

accentmicrocell.com

Modern India's Leading Excipients Manufacturer

PRECISION IS IN OUR DNA We believe that when it's a matter of health and life, it's either precision or nothing.

Accent Microcell **GROUND TO GLORY**

ABOUT Incorporated in the year 2001 with a vision to add value to the healthcare industry, we've come a long way to becoming the trusted partner of globally renowned brands stationed in 75+ countries. If there was one particular attribute that we had to credit for this success, it's the 'no compromise' approach that is imbibed in our DNA. Along with that, the consistent need to innovate and evaluate our range of products, technology, and processes with our in-house 'Brain Squad' is something that keeps us ahead of the curve.

> We strive to develop, produce, and supply the highest quality excipients that are used across Nutraceutical, Pharmaceutical, Food, Cosmetic, and other industries.



Our Humanitarian

APPROACH

ACROSS THE GLOBE 75*

OUR PHILOSOPHY

Although being a corporate entity, we take pride in the human-centric approach that is firmly anchored in our beliefs and provides us with guidance in our daily work. To us, it's the people that matter; to us, it's the C.A.R.E. that matters!

Courage

Assertiveness





CERTIFICATIONS & GRADES



















USP/NF, EP, JP, BP, IP Standardised Grades

Tailor-made solution for

PACKING & SHIPPING

For our world-class products, we ensure safe worldwide shipments for undiluted applications. To make this possible, the containers are stored in state-of-the-art packaging materials that are kept in a temperature-controlled facility. We also provide customized packaging options for special-case requirements.

20-25 Kg pack sizes available with an option of 4 types containers.



HDPE Drums



Fibre Drums



All above packing options are with LDPE inner liner.

Container Stuffing

For us, container stuffing isn't just a matter of placement but a scientific process done with careful planning. We also take into consideration the de-stuffing process at the other end of the journey; as a part of our commitment to an unmatched service experience.



We provide professional and efficient container stuffing services to all our global clients according to the table below:

		20' Container			40' Container					
Sr. No.	Packing Type	No. of Bags/Box /Drum	Pallets in No.	Quantity (KG) in Each Pallet	Total QTY (KG)	No. of Bags/Box /Drum	Pallets in No.	Quantity (KG) in Each Pallet	Total QTY (KG)	
1	Paper Bag	500	20	500	10000	1000	40	500	20000	
	(20 Kg)					1200	40	600	24000	
2	Carton Box	270	10	5400	9000	540	20	10800	18000	
2	(20 Kg)	180	10	3600	9000	360	20	7200	18000	
3	Carton Box	360	20	450	9000	720	40	450	18000	
٦	(25 Kg)				9000	9000				18000
4	Fibre Drum	160	10	400	6000	640	40	400	16000	
4	(25 Kg)	80	10	200	6000				16000	
5	HDPE Drum	160	10	400	6000	640	40	400	16000	
5	(25 Kg)	80	10	200		6000				16000
6	Euro Pallet loading in					240	10	480	20000	
0	bags					760	38	400	20000	

7

PRODUCTS

Our innovative and highly functional excipients enable our customers to develop unique, cost effective, and fast-time-to-market formulations.

accel

- Microcrystalline Cellulose (MCC) Spray Dried / Spin Flash Dried
- Microcrystalline Cellulose Spheres (MCC Spheres)
- Silicified Microcrystalline Cellulose (SMCC)
- Powdered Cellulose (PC)
- Microcrystalline Cellulose with Carboxy Methyl Cellulose (RC)

acrocell

- Croscarmellose Sodium (CCS)

maccel

- Magnesium Stearate (Mg. St.)

Refer to Annexures in the end for technical info





Microcrystalline Cellulose (MCC)

_ Multi-Function Excipient

Microcrystalline Cellulose is a refined wood pulp, Finest element for tableting because of it's purity. Used as an alternative to Carboxymethyl Cellulose and Lactose. Most commonly used in vitamin supplements & tablets.

accel 101

- Free flowing, ideal for wet granulation
- For Wet granulation, extrusion, spherization

accel 105

- Finest size
- Direct compression of crystalline API's, ideal for dry granulations, and wet granulations

accel 200

- Larger particle size, Better flow. good compressibility
- Beneficial in weight variation, and improve content uniformity

accel 102-102HD

- Larger Size, For direct compression
- Better Flow, improve flow properties of crystalline API's, Proper disintegration

accel 112

- Coarser particles, beneficial for direct compression, Lower in moisture content
- Direct compression of high moisture sensitive drugs

accel 103

- Low moisture content. Free flowing
- For moisture sensitive API's, Compatible with crystalline materials

accel 113

- Fine particle size, low moisture content
- For better granulation of moisture sensitive drugs, roller compaction and dry granulation

accel 301

- High density particles
- High Density, better flow, weight, uniformity, better capsule filling

For technical specifications, refer to Annexure #1 on page 23.

acrocell

Croscarmellose Sodium (CCS)

Super Disintegrant

CCS, is a cross-linked polymer of Carboxy Methyl Cellulose and Sodium. It appears as white, fibrous, free-flowing powder. With Acrocell, tablet may disintegrate appropriately, ultimately providing good dissolution and actives absorption / desired bioavailability.

acrocell

- Beneficial for Low concentration
- Desired disintegration of tablet
- Capillary action / wicking action

acrocell LM

- Better disintegration
- Ideal for low moisture sensitive drugs

For technical specifications, refer to Annexure #3 on page 25.

Silicified Microcrystalline Cellulose (SMCC)

High-Function Excipient

SMCC is a co-processed blend of Microcrystalline Cellulose (MCC) and Colloidal Silicon Dioxide (SiO2) by spray drying technology. It brings better flowability to MCC's excellent compaction. It has dual characteristics of brittle fracture as well as plastic deformation; leading to superior binding properties. It can even replace granulations, while reducing no. of required excipients.

accel SMCC 50

- · High intrinsic flow
- Enhanced lubrication efficiency
- Superior binding properties
- Enhance blending efficiency
- Ideal for capsule manufacturing
- Improved properties like weight uniformity, friability, disintegrations, etc.

accel SMCC 50 LD

- · Low density
- Better for low dose drug formulation
- Flow improvement of crystalline blends

accel SMCC 90LN

 Low moisture content, better compressibility of low moisture sensitive drugs, direct compression

accel SMCC 90-HD 90

- Excellent compactibility
- · Desired flow properties
- Good flow to direct compression
- Increased production capacity
- Easy for dry bledding in capsule
- Improved blending properties

For technical specifications, refer to Annexure #4 on page 26.

accel

Microcrystalline Cellulose Spheres (MCC Spheres)

MCC spheres are carriers for potential APIs and nutraceuticals for targeted drug delivery system. They can be filled into capsules or compacted into tablets, while the tight particle size distribution maximizes content uniformity.

Characteristics

- Spherical In Shape
- 100 % Cellulose Spheres
- Low Moisture
- Feasible For Coating In FBP
- High Surface Area
- · Uniform Coating Of API
- Better Compressibility

Products

- Accel MCC Spheres 100
- Accel MCC Spheres 200
- Accel MCC Spheres 350
- Accel MCC Spheres 500
- Accel MCC Spheres 700
- Accel MCC Spheres 1000

For technical specifications, refer to Annexure #5 on page 27.

accel

Powdered Cellulose (PC)

Multi-function Fiber

Powdered Cellulose or Alpha Cellulose is a purified, mechanically disintegrated cellulose prepared from alpha-cellulose of fibrous plant materials. It is an odorless, tasteless, hydrophobic powder of various particle sizes, and forms - from flaky & coarse to fluffy & free flowing.

Characteristics

- · Tablet diluent and filler in two-piece
- Hard capsules
- A bulking agent
- To increase the physical size of the dosage form
- · Acceptable compression properties
- Reduce the sedimentation rate of oily suspension fills
- Suspending agent in aqueous suspensions
- Good for extrusion/spheronization

For technical specifications, refer to Annexure #2 on page 24.

maccel

Magnesium Stearate (MS)

Lubricant

MS acts as a lubricant, it provides a free flow to the blend throughout the manufacturing process. Thus speeding up production. It also prevents molecular clumping which ensures accurate dosage form.

Characteristics

- · High surface area
- · High whiteness
- Better lubricity

Better improvement of flow in moisture sensitive and crystalline API's

For technical specifications, refer to Annexure #6 on page 28.

accel RC

Microcrystalline Cellulose with Carboxy Methyl Cellulose _____

___ Rheology Modifier

13

Desired viscosity modifier in suspensions as well as emulsions formulations

Characteristics

Products

Viscosity Modifier


• RC 581

• Stabilizer

• RC 591

For technical specifications, refer to Annexure #7 on page 29.

12

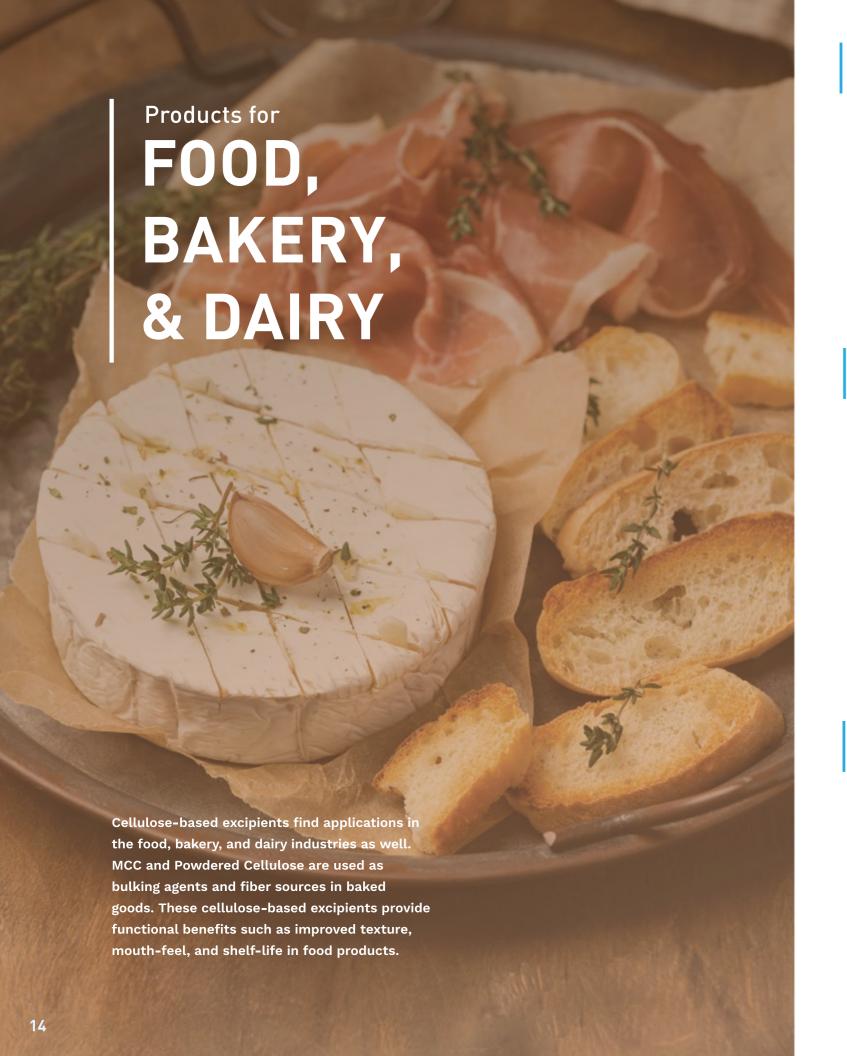

Microcrystalline Cellulose (MCC)

Multi-Function Excipient

Microcrystalline Cellulose is a refined wood pulp, it is a natural fiber, white, odorless and tasteless powder composed of free-flowing extremely fine particles. It can be used to enhance food products such as meats, bakery items, dairy, etc..

accel 105

- Low particle size
- Useful as a gelling agent

For technical specifications, refer to Annexure #1 on page 23.

accel

Powdered Cellulose (PC)

Multi-function Fiber

Powdered Cellulose or Alpha Cellulose is a purified, mechanically disintegrated cellulose prepared from alpha-cellulose of fibrous plant materials. It is an odorless, tasteless, hydrophobic powder of various particle sizes, and forms. it is an inert substance, is not degraded during digestion and has no appreciable absorption and is useful to provide dietary bulk.

Characteristics

- Anticaking Agent
- Used as a Binder
- · Used as a Texturizer

- · Works as a dietary fiber
- Used to control calory intake
- Used to provide firmness

For technical specifications, refer to Annexure #2 on page 24.

accel

Microcrystalline Cellulose with Carboxy Methyl Cellulose (RC) _ Rheology Modifier

Desired viscosity modifier in suspensions as well as emulsions formulations

Characteristics

Products

• Viscosity Modifier

• RC 581

Stabilizer

• RC 591

For technical specifications, refer to Annexure #7 on page 29.

Products for

COSMECEUTICALS & PERSONAL CARE

Cellulose-based excipients such as MCC, SMCC, and Powdered Cellulose are used in cosmeceuticals and personal care products as stabilizers, emulsifiers, and thickening agents. MCC and Powdered Cellulose are used as exfoliating agents and absorbents while SMCC is used as a film-forming agent. These excipients provide various functional benefits in cosmetics and personal care products such as improved texture, spreadability, and stability.

accel

Microcrystalline Cellulose (MCC)

Viscosity Modifier

Microcrystalline Cellulose is derived from cellulose, a natural polymer found in plant cell walls. It is used as a bulking agent, stabilizer, texture enhancer, and oil-absorbing agent in various formulations. MCC helps enhance the spreadability of creams, lotions, and powders.

accel 101

- · Free flowing, ideal for wet granulation
- · Works as a diluent

accel 102

- · Larger particle size, ideal for scrubbing
- · Works as a diluent

accel 105

- · Finest particle size
- · Ideal for gelling

For technical specifications, refer to Annexure #1 on page 23.

accel

Powdered Cellulose (PC)

Multi-function Fiber

Powdered Cellulose is a finely ground form of cellulose. In cosmetics and personal care products, it is used as an absorbent, texturizer, and thickening agent. Powdered Cellulose helps improve product consistency, provides a smooth feel, and enhances the spreadability of products

Characteristics

- · Works as a great absorbent
- · Can be used as a texturizer
- · Can be used as a bulking agent

- · Best thickener than other synthetics
- · Is natural and non-irritating
- Has good compatibility

For technical specifications, refer to Annexure #2 on page 24.

accel

Silicified Microcrystalline Cellulose (SMCC)

SMCC is a co-processed blend of Microcrystalline Cellulose (MCC) and Colloidal Silicon Dioxide (SiO2). It is like a superior version of MCC. The addition of silicon dioxide provides improved moisture resistance and increased compatibility with other ingredients.

Characteristics

- Great balance of compaction & flow
- Useful as a mattifying agent
- · Helps increase stability
- · Improves texture of formulation & skin

Products

- accel SMCC 50
- accel SMCC 90
- accel SMCC HD 90

For technical specifications, refer to Annexure #4 on page 26.

accel

Microcrystalline Cellulose with Carboxy Methyl Cellulose (RC)

Rheology Modifier

Desired viscosity modifier in suspensions as well as emulsions formulations

Characteristics

Products

· Viscosity Modifier

• RC 581

Stabilizer

• RC 591

Products for

TEXTILE, LEATHER, PAPER, AND BOARDS

Products for PAINTS, CERAMICS, CONSTRUCTION & CEMENTS

accel

Powdered Cellulose (PC)

Multi-function Fiber

Powdered Cellulose or Alpha Cellulose is a purified, mechanically disintegrated cellulose prepared from alpha-cellulose of fibrous plant materials. It is an odorless, tasteless, hydrophobic powder of various particle sizes, and forms - from flaky & coarse to fluffy & free flowing.

Applications (Textile & Leather)

- · Used as a sizing, leveling, and thickening agent
- Used as a hypoallergen
- Used to inhibit the growth of bacteria
- Best for making medical clothing, smooth, and soft clothing
- Can withstand climate changes
- Has long tenacity

Applications (Paper & Boards)

- Used as an antisticking agent
- Used as a natural filler
- Used to improve surface coating, ink absorption and print quality
- Used to enhance Texture & Bulk
- Is a naturally derived, sustainable material

For technical specifications, refer to Annexure #2 on page 24.

accel

Microcrystalline Cellulose (MCC)

_ Multi-Function Excipient

Microcrystalline Cellulose is a refined wood pulp, derived from cellulose. It is manufactured by treating cellulose with mineral acids to break it down into small crystalline particles.

Applications (Paints & Ceramics)

- Used as a rheology modifier to control viscosity & flow
- · Used as an opacifier to improve whiteness
- Used to improve durability and scrub resistance
- · Used to improve uniformity and adhesion
- · Used as a plasticizer in ceramics to control shape

Products

- accel MCC 105
- accel MCC 102
- accel MCC 101

Applications (Construction & Cement)

- Used as a rheology modifier to control viscosity & mixability of the materials
- Used to control water retention properties to improve workability and hydration
- Used to improve fiber reinforcement and control mechanical properties of cement-based materials
- Used as a micro-filler
- Used to control durability of materials

For technical specifications, refer to Annexure #1 on page 23.

accel

Microcrystalline Cellulose with Carboxy Methyl Cellulose (RC) __ Rheology Modifier

Desired viscosity modifier in suspensions as well as emulsions formulations

Characteristics

Products

Viscosity Modifier

• RC 581

Stabilizer

• RC 591

For technical specifications, refer to Annexure #7 on page 29.

18

Products for

WELDING ELECTRODES

Products for RUBBER

accel

Microcrystalline Cellulose (MCC)

Coating Agent

Microcrystalline Cellulose is a refined wood pulp. It is primarily used as a coating agent to electrodes. It improves their welding properties depending upon the type of coating.

Benefits

- Useful in Metal Arc welding and High Arc Voltage
- Deep penetration welding in any position
- Light amount of slag
- Welding in vertical down position
- · Circumferential welds on pipelines

Products

- accel MCC 101
- accel MCC 102

For technical specifications, refer to Annexure #1 on page 23.

Benefits

accel

• Used as Reinforcing filler to improve tensile strength, tear & abrasion resistance

Microcrystalline Cellulose (MCC)

- Reduce the energy required for dispersion
- Reduce Internal temperature during compounding

rubber-molded products.

- Control viscosity, breathability and stability
- Improve bonding and adhesion to other materials
- Improve homogeneity and uniformity

Products

Green Reinforcing Filler

- accel MCC 101
- accel MCC 102

Products for

PLASTICS

For technical specifications, refer to Annexure #1 on page 23

Microcrystalline Cellulose is a refined wood pulp. It improves the mechanical properties of rubber

products. It is widely utilized in applications such as tires, conveyor belts, seals, and various

Products for FILTRATION

accel

Microcrystalline Cellulose (MCC)

Filtration Media

Microcrystalline Cellulose is a refined wood pulp. It enhances filtration efficiency, captures suspended solids, and improves cake formation, making it valuable for liquid and air filtration. Ideal for filtration of all types of organic solutions, brine, edible oils, as well as galvanic baths.

Benefits

- A reliable depositing media
- Economical filter aids
- Excellent separating ability
- Used as membrane support material

Products

- accel MCC 101
- accel MCC 102

accel

Microcrystalline Cellulose (MCC)

_ Multi-Function Excipient

Microcrystalline Cellulose is a refined wood pulp. It is a versatile additive used as a filler, reinforcing agent, and processing aid in plastic formulations, resulting in stronger and more stable plastic products.

Benefits

- Staring material to bio-plastics
- Thickening to high viscous materials
- Improve ease of moulding
- · Antiadherant to the wall of moulds
- Film-forming agent
- Improves stiffness and durability
- Enhance thermal stability

Products

- accel MCC 101
- accel MCC 102

For technical specifications, refer to Annexure #1 on page 23.

For technical specifications, refer to Annexure #1 on page 23.

ANNEXURE



Particle Size Distribution Sieve Analysis (% Retention) Spray Dryer **Bulk Density** LOD DOP D50 (µm) D90 (µm) (gm/ml) (%) Grade 100 Mesh 60 Mesh 200 Mesh Accel-101 NMT 30 40 - 60 NLT 80 0.27-0.34 NMT 5.0% NMT350 < 1.0% < 30.0% Accel-102 NMT 45 70 - 100 NLT 140 < 8.0% >45.0% 0.26-0.34 NMT 5.0% NMT350 Accel-102HD NMT 45 70 - 100 **NLT 140** < 8.0% >45.0% 0.30-0.36 Accel-103 NMT 30 40 - 60 NLT 80 < 30.0% 0.26-0.34 NMT 5.0% NMT350 Accel-105 NMT 10 NMT 5.0% NMT350 10 - 30 NLT 37 NMT 10.0 % on 400 Mesh 0.20-0.30 Accel-112 NMT 45 70 - 100 **NLT 140** < 8.0% >45.0% 0.26-0.34 NMT 1.5% NMT350 Accel-113 NMT 30 NLT 80 < 1.0% < 30.0% 0.26-0.34 NMT 5.0% NMT350 40 - 60 Accel-200 NMT 70 150-200 **NLT 260** >10.0% 0.31-0.39 NMT 5.0% NMT350 Accel-301 NMT350 NMT 30 40 - 60 NLT 80 < 1.0% < 30.0% 0.34-0.45 NMT 5.0% Accel-302 NMT 45 NLT 140 < 8.0% >45.0% 0.35-0.45 NMT 5.0% NMT350 70 - 100 94 Mesh 38 Mesh 300 Mesh Accel-12 NMT 5.0% NMT 45 NLT 140 0.26-0.40 NMT350 70 - 100 <50.0% >70.0 %

DETAILS				
Identification A (USP/BP), B (EP), 1 (JP), (Zinc Chloride test)	Conforms			
Identification B (Degree of Polymerization)	NMT 350			
Identification 2	Conforms			
Solubility (coppertetramine solution)	Dissolves			
Ph	5.0-7.5			
Conductivity	NMT 75 µS.cm-1			
Water - Soluble Substance	NMT 0.25%			
Ether - Soluble Substance	NMT 0.05%			
Loss on Drying	NMT 7.0%			
Heavy Metals	NMT 10 PPM			
Residue on Ignition / Sulphated Ash	NMT 0.1%			
Bulk Density	0.27 to 0.34 g/ml			
Assay (Dried)	97.0% to 102.0%			
Sieve Analysis (% Retention)				
60 Mesh	≤ 1.0%			
200 Mesh	≤ 30.0%			
Particle Size Distribution				
PSD D10	≤ 30µ			
PSD D50	40 – 60µ			
PSD D90	≥ 80 µ			
Black Particle	NMT 08 per 600 cm2			

DESCRIPTION

White or almost white, fine or granular crystalline powder, practically insoluble in water, in dilute acids, in most of organic solvents and in dilute NaOH solution(1 in 20).

MICROBIAL LIMITS					
Total Viable Aerobic Count	NMT 1000 cfu/g				
Total yeast & Mould Count	NMT 100 cfu/g				
Staphylococcus aureus	Absent				
Escherichia coli	Absent				
Pseudomonas aeruginosa	Absent				
Salmonella species	Absent				

NOIE:

Technical specifications mentioned here are for the Spray Dryied Grade MCC; Accel-101. Contact us for details on NSD Grades and/or other Accelgrades.

DETAILS				
Description	White or almost white, exhibits degrees of fineness ranging from free-flowing dense powder to a course, fluffy, non-flowing material.			
Identification A,1 (Zinc Chloride test)	Confirms			
Identification B (Degree of Polymerization)	NLT 440			
Identification 2, Suspension test	Confirms			
pH (10% suspension in water)	5.0-7.5			
Conductivity	NMT 75 mS.cm-1			
Water - Soluble Substance	NMT 1.5 %			
Ether soluble substance	NMT 0.15 %			
Heavy Metals	NMT 10 PPM			
Arsenic	NMT 3 PPM			
Lead	NMT 2 PPM			
Mercury	NMT 1 PPM .			
Cadmium	NMT 1 PPM .			
Loss on Drying (105°C, 3 hours)	NMT 6.5%			
Sulphated Ash	NMT 0.3%			
Assay	NLT 92% .			
Starch	Not detectable .			
Bulk Density	For Information			
Sieve Analysis (9	% Retention)			
> 250 µm	Max. 1%			
> 75 µm	Max. 30%			
> 32 µm	Min. 50%			

MICROBIAL LIMITS				
Total Viable Aerobic Count	N.M.T. 1000cfu/g			
Total yeast & Mould Count	N.M.T 100cfu/g			
Staphylococcus aureus	Absent			
Escherichia Coli	Absent			
Pseudomonas aeruginosa	Absent			
Salmonella species	Absent			

Grade	Raw Material	Non GMO	Loss on Drying	Solvent content
CCS Regular	wood pulp		max. 10%	max. 1% MeOH
CCS Premium	wood pulp	√	max. 10%	max. 0.5% EtOH
CS Premium LM	wood pulp	√	max. 6%	max. 0.01% EtOH

	_
DETAILS	
Description	White or Greyish- White Powder.
Identification (A, B, C) (1,2,3)	Confirms
Degree of substitution	0.60 to 0.85
Loss on Drying	NMT 10.0%
Ph	5.0-7.0
Content of Water - Soluble Substance	NMT 10.0%
Residue on Ignition / Sulphated Ash	14.0% to 28.0%
Settling volume	10.0 to 30.0 ml
Sodium chloride & sodium glycolate	NMT 0.5%
Heavy Metals	NMT 10 PPM
Iron	NMT 10 PPM
Particle size (% Passes t	hrough)
100 Mesh (CCS - REGULAR)	NLT 98.0%
200 Mesh (CCS - PREMIUM)	NLT 98.0%

MICROBIAL LIMITS				
Total Viable Aerobic Count	N.M.T. 1000cfu/g			
Total yeast & Mould Count	N.M.T 100cfu/g			
Staphylococcus aureus	Absent			
Escherichia Coli	Absent			
Pseudomonas aeruginosa	Absent			
Salmonella species	Absent			

Spray Dryer Grade	APS (µm)	Bulk Density (gm/ml)	PROPERTY
AccelSMCC 50	65	0.25-0.37	Optimal compaction & Decent Flow
AccelSMCC 50 LD	50	0.20-0.30	Best in class binder
AccelSMCC 90	125	0.25-0.37	Balance of Flow & Compaction
AccelSMCC HD 90	125	0.38-0.50	Optimal Flow & Consolidation Best Disintegration Times Low moisture grade available
AccelSMCC 90 LM	125	0.27-0.39	Equivalent to SMCC 90, with lower moisture content (<3%)

DETAILS	
Identification Test A	IR Confirms a
Identification B, A,1(Iodinated Zn	Violet Blue Colour
Identification C,2 (NH4Mo)	Deep Yellow Colour
D,3(SiO2 disp. Uniformity Test)	Variance < 0.02%
Degree of Polymerization	NMT 350
Solubility (Ammoniacal solution of Copper Tetrammine)	Dissolves
рН	5.0-7.5
Conductivity	Max. 75µS.cm-1
Ether - Soluble Substance	Max. 0.05%
Water- Soluble Substance	Max. 0.24% as
Heavy Metals	Max.10 ppm
Loss on Drying (105°3hr.)	NMT 6.0%
Loss on Drying (105°3hr.) SMCC-90LM	NMT 3.0%
Residue on Ignition	1.80 - 2.20
Average Particle Size (90)	65 µ
PSD D10	20- 50 μ
PSD D50	90- 150 μ
PSD D90	190- 300µ
Average Particle Size (90 LM)	125 µ
Average Particle Size (50)	65 µ as
Average Particle Size (50 LD)	50 μ
Bulk Density (90)	0.250 – 0.370 g/ml
Bulk Density (90 -LM)	0.250 – 0.390 g/ml
Bulk Density (50)	0.250 – 0.370 g/ml
Bulk Density (50 - LD)	0.250 – 0.300 g/ml
Tapped Density	0.370 – 0.500 g/ml
Black Particle Count/600 cm2	NMT 08

DESCRIPTION
White or almost white, fine or granular crystalline powder, practically insoluble in water, in dilute acids, in most of organic solvents and in dilute NaOH solution (1 in 20).

MICROBIAL LIMITS				
Total Viable Aerobic Count	Max.1000cfu/g			
Total yeast & Mould Count	Max. 100cfu/g			
Staphylococcus aureus in 10 g	Absent in 10g.			
Escherichia Coli in 10g	Absent in 10g.			
Pseudomonas aeruginosa in 10 g	Absent in 10g.			
Salmonella species in 10 g	Absent in 10g.			

04-	Size		Bulk Density
Grade	(mesh)	(µm)	(gm/ml)
Accel MCC Spheres 100	70 – 140	100 – 200	0.7 - 0.8
Accel MCC Spheres 200	45 – 70	200 – 355	0.8-0.9
Accel MCC Spheres 350	35 – 45	355 – 500	0.8-0.9
Accel MCC Spheres 500	25 – 35	500 – 710	0.8-0.9
Accel MCC Spheres 700	18 – 25	710 – 1000	0.8-0.9
Accel MCC Spheres 1000	14 – 18	1000 – 1400	0.8-1.0

DETAILS		
Description	White or almost white, fine or granular crystalline powder, practically insoluble in water, in dilute acids, in most of organic solvents and in dilute NaOH solution(1 in 20).	
Identification A (USP/BP), B (EP), 1 (JP), (Zinc Chloride test)	Have to correspond as NF,EP,JP	
Identification A (EP)	Have to correspond as NF,EP,JP	
Identification B (USP/EP), 3 (JP), C (EP), (Degree of Polymerization)	NMT 350 as USP/NF,NF,EP,JP	
Identification 2 (JP)	Have to correspond as JP	
Solubility (coppertetramine solution)	Have to correspond as NF,EP,JP	
Ph	5.0-7.5 as NF,EP,JP	
Conductivity	NMT 75µS.cm-1 as NF,EP,JP	
Water - Soluble Substance	NMT 0.25% as NF,EP,JP	
Ether - Soluble Substance	NMT 0.05% as NF,EP,JP	
Loss on Drying	NMT 7.0% as NF,EP,JP	
Heavy Metals	NMT 10 PPM NF,EP,JP	
Residue on Ignition / Sulphated Ash	NMT 0.1% as NF,EP,JP	
Bulk Density	0.7 TO 1.0 g/ml	
Assay (Dried)	97.0% to 102.0%	
Particle Size (70-140 Mesh)	100 to 200 μm	
Particle Size (45-70 Mesh)	200 to 355 μm	
Particle Size (35-45 Mesh)	355 to 500 μm	
Particle Size (25-35 Mesh)	500 to 710 μm	
Particle Size (18-25 Mesh)	710 to 1000 µm	

MICROBIAL LIMITS		
Total Viable Aerobic Count	NMT 1000 cfu/g as NF,EP,JP	
Total yeast & Mould Count	NMT 100 cfu/g as NF,EP,JP	
Staphylococcus aureus	Absent as NF,EP,JP	
Escherichia coli	Absent as NF,EP,JP	
Pseudomonas aeruginosa	Absent as NF,EP,JP	
Salmonella species	Absent as NF,EP,JP	

Microcrystalline Cellulose with Carboxy Methyl Cellulose (RC) _ Stabilizer & Suspender

DETAILS	
Description	White, very fine, light powder, greasy to the touch, Practically insoluble in water & in anhydrous ethanol.
Identification A(Freezing point)	Have to correspond as Ph. Eur.,BP
Identification B(Acid Value)	195 to 210 as Ph. Eur.,BP
Identification A (USP), D (BP,Ph.Eur)	Have to correspond as USP,BP,Ph.Eur
Identification B (USP), C (BP,Ph.Eur)	Have to correspond as USP,BP,Ph.Eur
Acidity or Alkalinity	Have to correspond as USP,BP,Ph.Eur
Chloride	NMT 0.1% as USP/NF,Ph.Eur.,BP
Sulphates	NMT 0.5% as USP/NF,Ph.Eur.,BP
Cadmium	NMT 3 PPM as USP/NF,Ph.Eur.,BP
Lead	NMT 10 PPM as USP/NF,Ph.Eur.,BP
Nickel	NMT 5 PPM as USP/NF,Ph.Eur.,BP
LOD	NMT 6% as USP/NF,Ph.Eur.,BP
Assay of Magnesium	4.0% to 5.0% as USP/NF,Ph.Eur.,BP
Fatty Acid composition	NLT 40% of Stearic Acid & NLT 90% of sum of stearic acids & palmitic acid as USP/NF,Ph.Eur.,BP
Bulk Density	0.22 to 0.35 gm/ml

MICROBIAL LIMITS		
Total Viable Aerobic Count	NMT 1000cfu/g as USP/NF,Ph.Eur.,BP	
Total Yeast & Mould Count	NMT 100cfu/g as USP/NF,Ph.Eur.,BP	
Escherichia coli	Absent as USP/NF	
Salmonella species	Absent as USP/NF	

Grade	Particler Size Distribution	Sodium Content	Viscosity (dynamic) 1.2% w/v aqueous dispersion
Accel RC 611	40.1% retained on a #60 mesh and 450% retained on a #325 mesh	0.012	50-118 mPa s (50-118 cP)
Accel RC 581	40.1% retained on a #60 mesh and 435% retained on a #200 mesh	0.008	72-168 mPa s (72-168 cP)
Accel RC 591	40.1% retained on a #60 mesh and 445% retained on a #325 mesh	0.008	39-91 mPa s (39-91 cP)

DETAILS		
Description	Fine powder, White to pale yellowish, odorless.	
Pharmacopoeial test items	Specification	
Identification	Have to correspond as NF, Ph. Eur.	
Clarity of Solution	Have to correspond as NF, Ph. Eur.	
Solubility in Copper Tetramine	Positive	
рН	6.0 - 8.0 as NF, Ph. Eur.	
Loss on Drying	NMT 8.0% as NF, Ph. Eur.	
Residue on Ignition	NMT 5.0% as NF, Ph. Eur.	
Heavy Metals	NMT 10 ppm as NF, Ph. Eur.	
Assaty (on died basis)	75-120 %	
Apparent viscosity of nominal value	60–140%	

MICROBIAL LIMITS		
Total Viable Aerobic Count	Max. 1000cfu/g as NF, Ph. Eur.	
Total yeast & Mould Count	Max. 100cfu/g as NF, Ph. Eur.	
Staphylococcus aureus	Absent as NF, Ph. Eur.	
Escherichia Coli.	Absent as NF, Ph. Eur.	
Pseudomonas aeruginosa	Absent as NF, Ph. Eur.	

NOTES

-		

NOTES

OUR UNITS

Unit 1 [excipients] | 15km away from HO

Survey No. 533/P, Paldi, Kankaj, Pirana Road, Ta. Daskroi, Dist. Ahmedabad - 382425, Gujarat, India

Phone: +91 2718 288001/288002

Unit 2 [excipients] | 250km away from HO

Plot No. Z/59-60-63, Dahej-SEZ, Part-I, Ta. Vagra,

Dist. Bharuch - 392130, Gujarat, India

Phone: +91 75758 05960

Accent Microcell Ltd.

314, Shangrilla Arcade, Shyamal Cross Roads, Anandnagar Road, Satellite, Ahmedabad - 380015, Gujarat, India.

eMail

info@accentmicrocell.com bus_intl@accentmicrocell.com

Phone

+91 79 40042367 / 32459689 / 32522633 / 40094906

www.accentmicrocell.com